

QSM11-1 Single Phase Meter

Smart Energy Meter



Overview

QSM11-1 is a single phase smart meter designed for industrial and commercial applications. The QSM11-1 is able to monitor and measure active/reactive energy with extended functionality and high accuracy. It support optional RF and GPRS communication module for different field application(such as dual-source control), and the system remote configuration is available for smart grid. It complies with DLMS Suite standards and multiple technical solutions for AMI or AMR.

DLMS

DLMS Suite 0 and Suite 1, provide high security and stability to communication.

Remote Control

Meter is with built-in latch relay, support remote operation switch of f and on.

Modularity

The product supports RF/PLC/GPRS/RS485 various communication.

QPM16 Single Phase Meter

Highlights

- STS standard protocol ensures an open operating system with high security. Support open protocol: DLMS/COSEM(E-Mode), IEC 62052-11, IEC62053-21, IEC 62055-41, IEC 62056-21.
- Prepayment/Post-payment mode switch and comply with the Dual Source function. Local and remote firmware upgrade.
- Extended RS485 and interface communication port comply with E-Mode. Remote communication module GPRS, RF, PLC-G3 or G4, and NB-IoT for AMR/AMI system.
- Relay control for load demand by remote communication or local configuration.

Main Function


- Measure active (kWh), reactive (Kvarh) for total/separately energy resistors for import and export, instantaneous value, maximum demand value, billing data, event records, historical data and consumption profile.
- High performance LCD display with backlight (up to 8 digits).

- Standard or extended load profile data recording (up to 8 data channels)
- Standardized OBIS display. Real time clock(RTC): clock with calendar, timing, year change function. Display readable without main power (RWP).
- Multiple event detections and records with categories of operation, power grid and tampering. Channel quantity customized before leaving the factory; up to 8 channels.
- Open meter cover and terminal cover detection.
- Prepayment via a numeric token with extended ways of recharging.
- Data for load profile record configuration.
- User-friendly mode for energy supply in low credit during weekends or holidays.
- Emergency Credit for a certain sum of energy supply depending on User's credit level.
- External and replaceable battery supply.
- LED alarm/buzzer alarm reminding, when low credit, overload, and tamper.


Technical Specification

Accuracy	Active	1.0
	Reactive	2.0
Voltage	Rated current	110V, 120V, 220V, 230V, 240V
	Range	0.8Un-1.2Un
	Limit	0.7Un-1.3Un
Frequency		50Hz/60Hz
Basic Current (Ib)	Range	5A, 10A
Maximum current (Imax)	Range	40A, 60A, 80A, 100A
Starting current		0.4%Ib
Display	Type	LCD
	Digit	6+2
Power	Voltage circuit	≤2.0W,10VA
Consumption	Current circuit	≤4VA
Communication	Interface	Optical/RS485/PLC/RF/GPRS/3G/4G
Temperature	Working	-25°C to +65°C
	Storage	-35°C to +75°C
Humidity		≤85%
Ingress Protection		IP54
Dimension		28mm*77mm*217mm
Weight	Net weight	0.71kg
	Weight	0.75kg

Dimension diagram

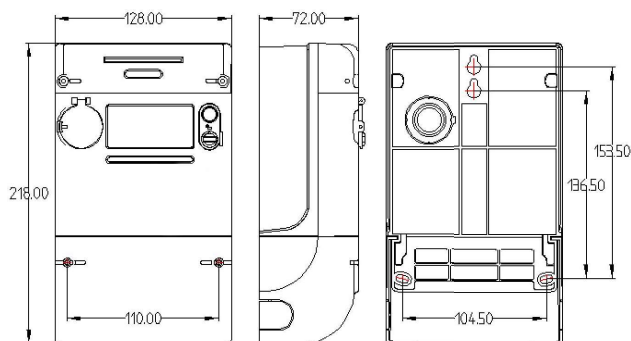

Connection diagram

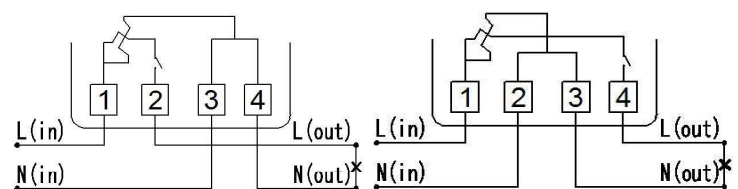

Asymmetrical Connection

Symmetrical Connection

